


4.1 Wiring Duct (Slotted)

Maximum service temperature: 85°C

Material: Rigid, high impact, self-extinguishing PVC (gray)

- Used primarily in control panels, the restricted slot design allows wires to be added or removed by simply deflecting the fingers on the side of the duct.
- Solid type wiring ducts also available

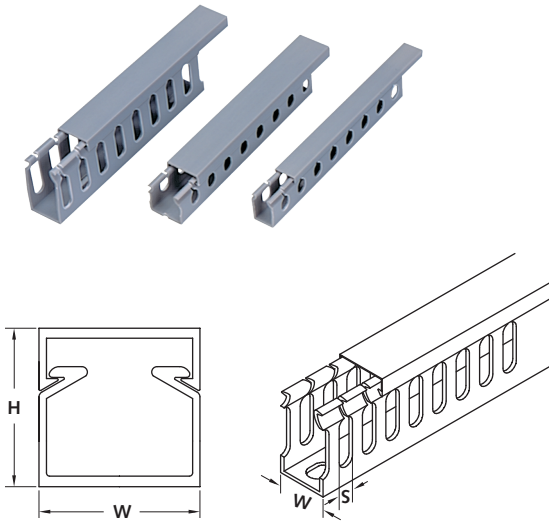

ITEM NO.	W X H (mm)	SLOT (mm)	WIRES TO BE CONTAINED	LENGTH
WD1525-4	15 X 25	4	5-12 PCS	2M
WD1525-6	15 X 25	6	5-12 PCS	2M
WD1525-8	15 X 25	8	5-12 PCS	2M
WD2525-4	25 X 25	4	10-25 PCS	2M
WD2525-6	25 X 25	6	10-25 PCS	2M
WD2525-8	25 X 25	8	10-25 PCS	2M
WD2545-4	25 X 45	4	20-25 PCS	2M
WD2545-6	25 X 45	6	20-25 PCS	2M
WD2545-8	25 X 45	8	20-25 PCS	2M
WD2565-4	25 X 65	4	40-45 PCS	2M
WD2565-6	25 X 65	6	40-45 PCS	2M
WD2565-8	25 X 65	8	40-45 PCS	2M
WD3333-4	33 X 33	4	25-45 PCS	2M
WD3333-6	33 X 33	6	25-45 PCS	2M
WD3333-8	33 X 33	8	25-45 PCS	2M
WD3345-4	33 X 45	4	40-55 PCS	2M
WD3345-6	33 X 45	6	40-55 PCS	2M
WD3345-8	33 X 45	8	40-55 PCS	2M
WD3365-4	33 X 65	4	60-75 PCS	2M
WD3365-6	33 X 65	6	60-75 PCS	2M
WD3365-8	33 X 65	8	60-75 PCS	2M
WD4545-4	45 X 45	4	60-70 PCS	2M
WD4545-6	45 X 45	6	60-70 PCS	2M
WD4545-8	45 X 45	8	60-70 PCS	2M
WD4565-4	45 X 65	4	110-120 PCS	2M
WD4565-6	45 X 65	6	110-120 PCS	2M
WD4565-8	45 X 65	8	110-120 PCS	2M
WD5050-4	50 X 50	4	80-90 PCS	2M
WD5050-6	50 X 50	6	80-90 PCS	2M
WD5050-8	50 X 50	8	80-90 PCS	2M
WD6060-4	60 X 60	4	120-135 PCS	2M
WD6060-6	60 X 60	6	120-135 PCS	2M
WD6060-8	60 X 60	8	120-135 PCS	2M
WD6545-4	65 X 45	4	110-120 PCS	2M
WD6545-6	65 X 45	6	110-120 PCS	2M
WD6545-8	65 X 45	8	110-120 PCS	2M
WD6565-4	65 X 65	4	180-200 PCS	2M
WD6565-6	65 X 65	6	180-200 PCS	2M
WD6565-8	65 X 65	8	180-200 PCS	2M
WD33100-8	33 X 100	8	180-200 PCS	2M
WD48100-8	48 X 100	8	215-250 PCS	2M
WD70100-8	70 X 100	8	250-300 PCS	2M
WD7264-8	72 X 64	8	200-220 PCS	2M
WD10075-8	100 X 75	8	260-320 PCS	2M
WD100100-8	100 X 100	8	300-400 PCS	2M
WD15075-8	150 X 75	8	335-500 PCS	2M